



Form 500- 1010

[www.GTPerformanceProducts.com](http://www.GTPerformanceProducts.com)

### GT 3 Installation Hub – Models 10-5067, 20-5067

Parts List:

- Hub (1)
- Extension adaptor (1)
- Mounting screws (3)
- S/W screws (6)
- Column wire (1)
- Ground wire (1)



**FITMENT:** GT3 Installation hub with 2.5” extension / conversion adaptor to fit 5 or 6 bolt steering wheels only.

GM Trucks 1995-99 Chevrolet/GMC Truck W/O Airbag

**NOTICE**

**Airbag equipped vehicles:** GT Performance Products steering wheels and hubs are **not** designed for use on Airbag equipped vehicles. **Due to Safety and Legal reasons**, we do **not** recommend changing, altering or removing the airbag from any vehicle.

**PRE-INSTALLATION INSTRUCTIONS**

- A) **Read all instructions completely prior to installation process!**
- B) Align wheels on vehicle straight ahead and disconnect battery.
- C) **Removal of Original or Custom Steering Wheel:** Refer to shop manual for your vehicle or manufacturer of custom steering wheel. **NOTE:** A steering wheel or gear puller may be required.

**INSTALLATION:**

- 1) Once original wheel is removed from column, remove wire from steering column and replace with column wire supplied. (Push down and twist counter-clockwise to remove and reverse to install new column wire).
- 2) Note “**top**” marking on hub, (2 vertical dimples indicating “top”) and position hub onto shaft, carefully routing wire thru hub as shown in **(Photo A)** Route wire in groove and prepare to route thru hole in extension adaptor.

Photo A



Top

Top

Photo B



- 3) Note “**top**” marking on extension and position onto hub, carefully routing wire thru hole on right side of extension and install shaft nut (loosely) to hold assembly in position. Install three (3) mounting screws, placing the ground wire under one of the screws. **(Photo B)**
- 4) Secure / Tighten shaft nut and mounting screws. **CAUTION:** Do not over tighten mounting screws; this will cause damage to the hub.


**TORQUE REQUIREMENTS**

Shaft nut: 25 / 30 ft. lbs.

Mounting screws: 10 / 12 ft. lbs.

- 5) Connect wires to bottom of horn button and carefully push horn button into center of steering wheel.

Photo C

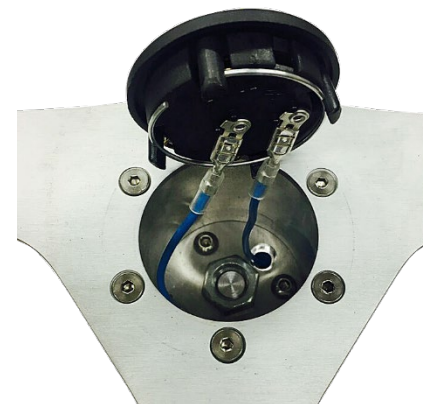

- 6) Reconnect battery and test operation of horn and turn signal canceling.

**GT Performance Products LLC  
Limited Warranty Policy**

We warrant our products ninety (90) days from the date of original purchase to be free from defects in material and workmanship. If, during this period, the product fails under normal usage because of a manufacturing defect, then we will replace or repair the item. To obtain repair or replacement under the terms of this warranty, notify us at, GT Performance Products, 2070 Floyd Street, Burbank, CA 91504. Proof of purchase and date of purchase are required to validate warranty.

All implied warranties, including the warranty of merchantability, are limited to the same ninety-day period from date of purchase. We are not liable for any consequential loss or property damage arising from any use of this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Offer good in U.S.A. and Canada only.

**NOTICE:**

For your own safety, do **not** use this product for any competitive or racing purposes; Racing does not constitute intended usage and therefore makes this warranty void.